



# Compact Wet/ Cold Location Exit Sign



## KEY FEATURES

### ILLUMINATION:

- Ultra bright, energy efficient, Red or Green LEDs

### ELECTRICAL:

- Dual 120/277VAC
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

### MOUNTING:

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

### HOUSING:

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Top and side K/O's provided for conduit feed applications
- Snap-out chevron directional indicators


### OPTIONS:

- **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- **2C:** Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time
- **TRH:** Tamper-resistant hardware helps prevent unauthorized access to the unit
- **CW:** Custom verbiage signs available on request

### WARRANTY / LISTING:

- \*5 year warranty on all electronics and housing. Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for wet locations (-4°F–122°F)

### DIMENSIONS:

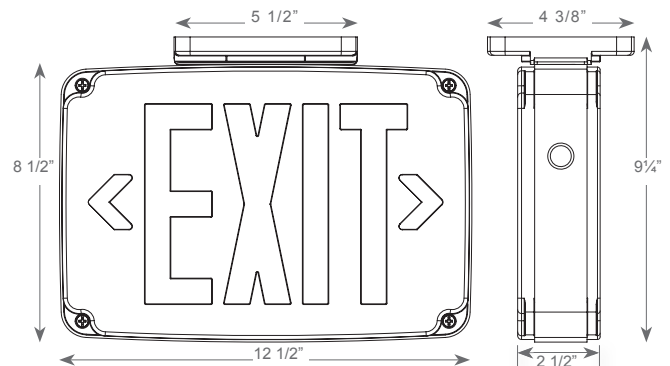

## ORDERING INFORMATION

Example: "EW-1R-N-B-TRH-CW"

MODEL	No. of FACES	LETTER COLOR	BATTERY	HOUSING COLOR	OPTIONS
EW	1 Single Face	R Red	A AC Only	W White	SD <sup>1</sup> Self-diagnostics
	2 Double Face	G Green	N NiCad Battery	B Black	TRH Tamper Resistant Hardware
				G Gray	2C <sup>2</sup> Dual circuit operation
					CW Custom Wording

### NOTES:

1. Available on NiCad exits only.
2. Available on AC only exits.

Specification is subject to change.

\*Warranty does not apply to installation errors, natural disasters, and/or abuse.

