



Thermoplastic LED Lightbar Combo



KEY FEATURES

ILLUMINATION:

- Ultra bright, energy efficient white LED emergency lighting
- 4.5W (36 LEDs x 0.125 watts) per LED lightbar
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "Lightbar" lens for optimal light distribution
- Long life, energy efficient Red or Green LEDs EXIT sign illumination

ELECTRICAL:

- Dual 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED Lightbar for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Remote capable standard

MOUNTING:

- Mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes
- Snap-out chevron directional indicators


OPTIONS:

- **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- **CW:** Custom verbiage signs available on request

WARRANTY / LISTING:

- *5 year warranty on all electronics and housing
- Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (32°F–122°F)

DIMENSIONS:

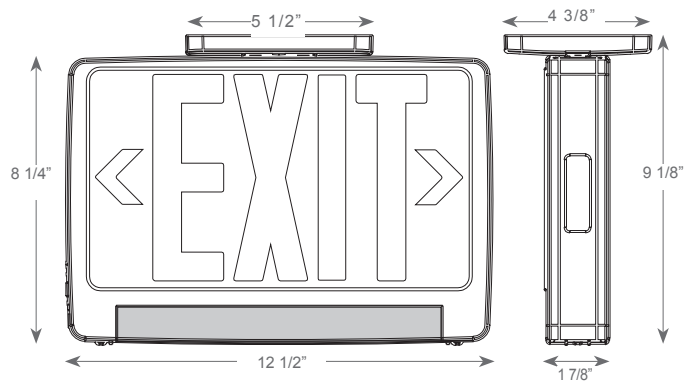

ORDERING INFORMATION

Example: "LBC-1R-W-SD-CW"

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LBC	1 Single Face	R Red	W White	SD Self-diagnostics
	2 Universal Single/Double	G Green	B Black	CW Custom Wording

Specification is subject to change.

*Warranty does not apply to installation errors, natural disasters, and/or abuse.

