



# Decorative Die-Cast Emergency Unit



## KEY FEATURES

### ILLUMINATION:

- Long life, efficient, ultra bright white LEDs
- 6W (2 LEDs x 3.0 watts) per unit
- Mirror-bright reflector and prismatic polycarbonate refractor
- Can be used as a Normally-ON or Normally-OFF light as well as on a switched circuit

### ELECTRICAL:

- Universal 120–277VAC
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Standard self-diagnostic test feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical and life safety codes
- Field-selectable wiring allows for “AC” operation of the unit to be controlled using a wall-switch or a photocell or any other switching mechanism

### MOUNTING:

- Surface mount via easy connect back plate that fits most standard size junction boxes
- Universal K/O pattern on back plate for wall mount
- Threaded opening at the top of the enclosure for conduit mount

### HOUSING:

- Decorative, Low Profile, architectural design
- Die-cast aluminum housing
- Durable powder-coated finishes in white, black, nickel and dark bronze
- Sealed and gasketed


### OPTIONS

- **CL:** Optional internal heater for extreme cold temperature applications (-4°F–122°F)
- **PC:** Unit features optional photocell technology that automatically responds to low exterior lighting levels in “AC” mode

### WARRANTY / LISTING:

- \*5 year warranty on all electronics and housing. Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for wet locations (32°F–122°F)

### DIMENSIONS:

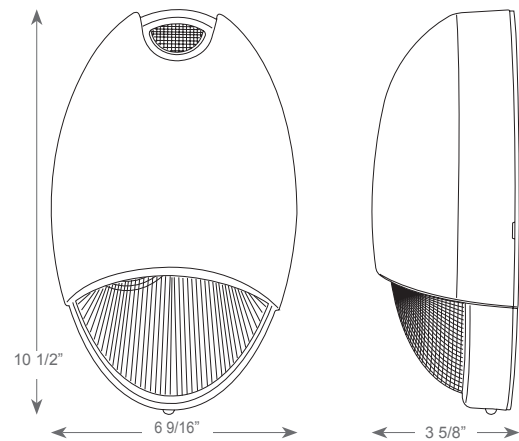

## ORDERING INFORMATION

Example: “WDACEM-BR-CL-PC”

| MODEL  | HOUSING COLOR |             | OPTIONS |                                |
|--------|---------------|-------------|---------|--------------------------------|
| WDACEM | W             | White       | CL      | Cold Location, internal heater |
|        | B             | Black       | PC      | Photocell                      |
|        | BR            | Dark Bronze |         |                                |
|        | N             | Nickel      |         |                                |

Specification is subject to change.

\*Warranty does not apply to installation errors, natural disasters, and/or abuse.

