



# Remote Capable Thermoplastic LED Exit Sign



## KEY FEATURES

### ILLUMINATION:

- Ultra bright, energy efficient, Red or Green LEDs

### ELECTRICAL:

- Dual 120/277VAC
- Provides 11 watts of remote capacity
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and remote lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

### MOUNTING:

- Mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

### HOUSING:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- Snap-out chevron directional indicators


### WARRANTY/LISTING:

- \*5 year warranty on all electronics and housing. Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (32°F–122°F)

### OPTIONS:

- **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- **CW:** Custom verbiage signs available on request

### DIMENSIONS:

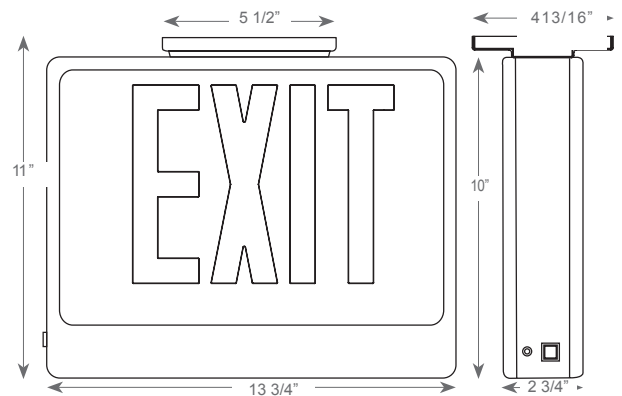

## ORDERING INFORMATION

Example: "EPRC-1R-N-W-SD-CW"

MODEL	No. of FACES	LETTER COLOR	BATTERY	HOUSING COLOR	OPTIONS	
EPRC	1	Single Face	R   Red	N   NiCad Backup	W   White	SD   Self-diagnostics
	2	Universal Single/Double	G   Green		B   Black	CW   Custom Wording

Specification is subject to change.

\*Warranty does not apply to installation errors, natural disasters, and/or abuse.

