



Thermoplastic LED Exit Sign



KEY FEATURES

ILLUMINATION:

- Ultra bright, energy efficient, Red or Green LEDs

ELECTRICAL:

- Dual 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- Snap-out chevron directional indicators
- Compact, low-profile design


WARRANTY/LISTING:

- *5 year warranty on all electronics and housing. Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (32°F–122°F)

OPTIONS:

- **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- **2C:** Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time
- **CW:** Custom verbiage signs available on request
- **USA:** Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act

DIMENSIONS:

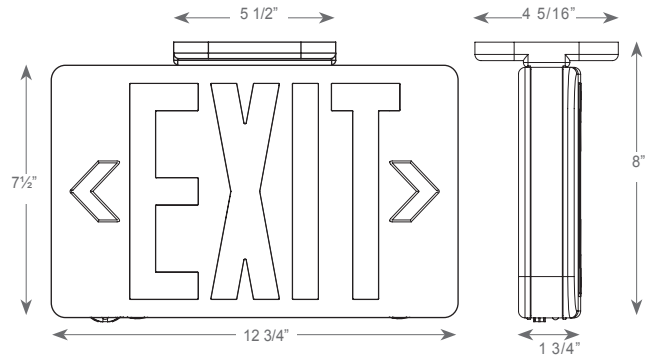

ORDERING INFORMATION

Example: "EP-1R-N-W-SD-CW"

MODEL	No. of FACES	LETTER COLOR	BATTERY	HOUSING COLOR	OPTIONS
EP	1 Single Face	R Red	A AC Only	W White	SD ¹ Self-diagnostics
	2 Universal Single/Double Face	G Green	N NiCad Battery	B Black	2C ² Dual circuit operation
					CW Custom wording
					USA Assembled in USA

NOTES:

1. Available on NiCad Exits only.
2. Available on AC only Exits.

Specification is subject to change.

*Warranty does not apply to installation errors, natural disasters, and/or abuse.

