



# RCL Series

## 5 / 6 Inch Recessed LED Retrofit Kit

Lightstat's energy efficient recessed LED retrofit kit provides bright, even illumination in an attractive and easy to install design.



### KEY FEATURES

#### ILLUMINATION:

- Long life LEDs with up to 50,000 hours at 70% lumen maintenance
- Uses 1.2 watts high power, high quality LEDs
- Choice of 2700K (± 200), 3000K (± 200), 4000K (± 200) or 5000K color temperature 80 CRI
- Produces 900–1060 lumens output from luminaire

#### ELECTRICAL:

- Dimmable to 10% with most dimmers
- Save 75% compared to incandescent sources
- High efficiency driver with a power factor ≥ .90 with input power of 120V, 50/60 Hz
- Built-in LED Driver
- Power consumption of 12 watts
- Operation temperature of 32°F-104°F

#### MOUNTING:

- Easy installation with adjustable torsion spring
- Torsion spring is designed to fit into 5" or 6" housing automatically without changing mounting tab
- No tools required for installation


#### HOUSING:

- Compatible with most 5" and 6" housings
- Compatible with insulated, non-insulated, and air-tight ceilings
- Durable thermoplastic construction
- E26 medium screw-base Edison connector provides easy retrofit of incandescent housings

#### WARRANTY/LISTING:

- Tested in accordance with IESNA LM79 & LM80
- ETL Listed for wet location
- Energy Star qualified
- Passes FCC Class A and Class B
- Meets State of California Title 24 requirements
- \*5 year warranty on all electronics and housing

#### DIMENSIONS:

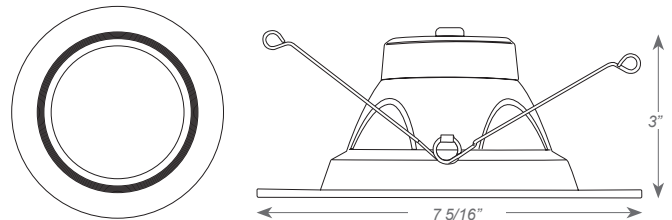

Kelvin Rating		Lumens
2.7K	2700K	900
3K	3000K	960
4K	4000K	1000
5K	5000K	1060

### ORDERING INFORMATION

Example: MODEL-TRIM/BAFFLE-COLOR TEMP  
i.e., "RCL56-BW-3K"

MODEL	TRIM / BAFFLE		COLOR TEMP	
	RCL56	BW	White Baffle	2.7K
			3K	3000K
			4K	4000K
			5K	5000K

Specification is subject to change.

\*Warranty does not apply to installation errors, natural disasters, and/or abuse.

