



Weatherproof MR16 Emergency Unit

KEY FEATURES

ILLUMINATION:

- Two fully adjustable, ultra bright, round, 7.2W MR-16 halogen lamp heads standard
- Optional 3.3W white LED lamp heads available

ELECTRICAL:

- Dual 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Wall mount via knockouts on the back of the housing

HOUSING:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations


OPTIONS

- **CL:** Optional internal heater and battery blanket for extreme cold temperature applications, (-13°F–122°F MR-16 halogen) (-13°F–104°F LED)
- **LED:** 3.3W high performance MR-16 base LED lamps
- **USA:** Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act

WARRANTY / LISTING:

- 5 year warranty on all electronics and housing. Battery pro rated for 2 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for wet locations (-4°F–104°F)

DIMENSIONS:

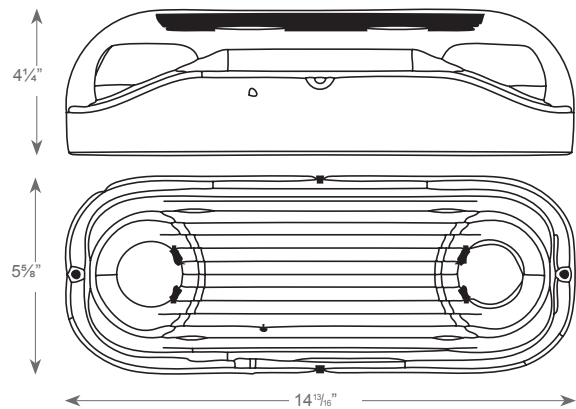

ORDERING INFORMATION

Example: "WEM-G-CL-USA"

MODEL	HOUSING COLOR		OPTIONS	
WEM	G	Gray	CL	Internal heater with battery blanket
	B	Black	USA	Assembled in USA
			LED	3.3W High Lumen White LED Lamps

Specification is subject to change.

*Warranty does not apply to installation errors, natural disasters, and/or abuse.

